


Protect your Float from Flashing and Boiling Damage.

If you are installing a magnetic level indicator into a process that can flash or boil, the float needs to be protected against damage in the event of phase change.

This can be accomplished by using an oversized chamber and an insert that keeps the float aligned with the indicator. The flashed gasses will escape around the float, preventing high velocity damage. The SOR® design utilizes a baffle plate and springs at both the top and bottom of the chamber, ensuring the float is protected throughout the life of the unit.

See the accessories section in the [catalog](#) for the Flashing/Boiling Protection option FB.

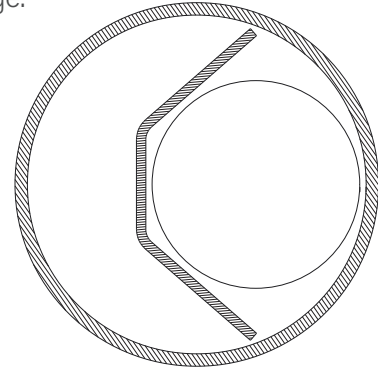


(flash and boiling design)



vista™ indicator technology provides

- Patented 200° viewing angle
- 250 feet or more forward viewing distance
- ANSI/ASME codes B31.1 and B31.3
- Schedule 40 316/316L stainless steel construction standard, Schedule 80 and other materials available
- Full penetration welds
- ASME Section IX and AWS qualified welding process
- No pressurized floats
- High visibility reflective scale
- 316 SS flanges standard
- Wide offering of auxiliary products such as point level switches, magnetostrictive transmitters and more
- Interface detection capability
- Cryogenic units
- NACE and CRN certifications available
- Dimensional drawings available at quotation
- Quick delivery
- Dependable operation for years of service
- 5 year warranty

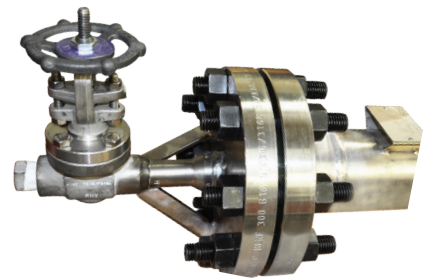

913-888-2630 | 800-676-6794 | [SORInc.com](#)