

## Product ISULLETIN


## **Enhanced 1540 Level Switch**

Fits all 2" full couplings and has higher pressure option

## **New Features**

The new and improved 1540 non-bleed pneumatic level switch builds on its proven design. Taking our suggestions straight from the field, we have either maintained or improved every critical specification while improving its usability. For example, the new 1540 is now suitable for **all** NPT 2" full coupling installations without interference from process build up. We have also extended the float further into the vessel without changing any of the external dimensions. This means that you can retrofit your old installation with the new product and still use your existing piping.

Next we added the option to handle higher pilot pressures up to 80 psi. Now you can choose between the 30 psi version and the 80 psi version to better match your system specifications.

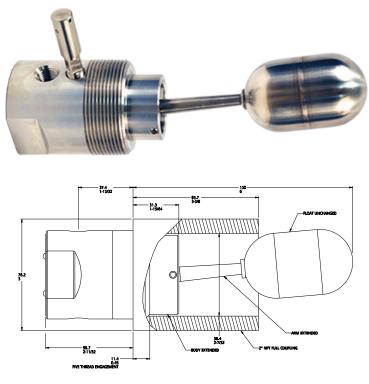

For further information or questions please contact Customer Service.

sorinc.com • 800-676-6794 USA • 913-888-2630

Design and specifications are subject to change without notice. For latest revision, go to sorinc.com.